




# City of Elmhurst

## Building Department

### Construction Site Fencing Policy

*Site fencing shall be defined as the fence that needs to be installed immediately after the hole is dug.*

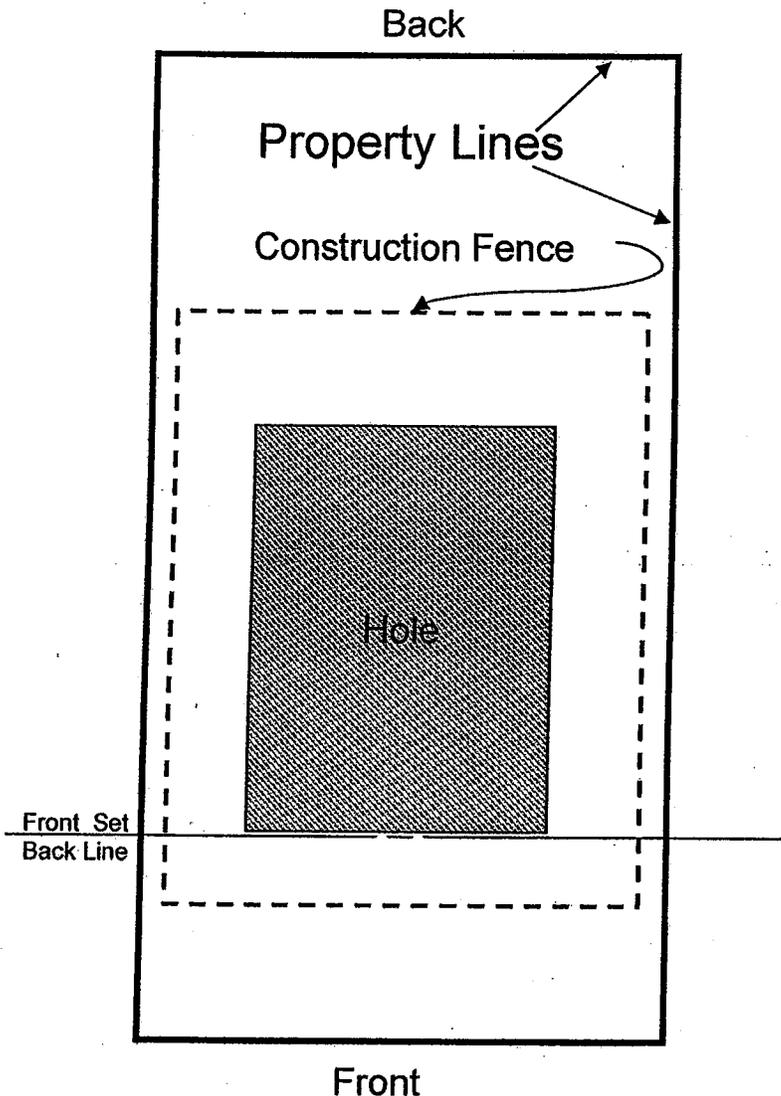

1. A 4'-0" high or greater height, temporary fence shall be erected immediately after the hole is dug for the new footing and foundation.
2. Use 6' long metal fence stakes embedded 2' in the ground.
3. Post a "No Trespassing" Sign.
4. The front or other portions of the fence, may be open during construction hours, but at the end of the day or when work ceases for the day, it needs to be closed so that the hole is secured.
5. The fence needs to stay in place until the first floor deck is secured with plywood and the foundation is backfilled.
6. The fence must be removed within 7 days after the plywood deck and backfilling.

Date: February 7, 2008

Revised: February 12, 2008